



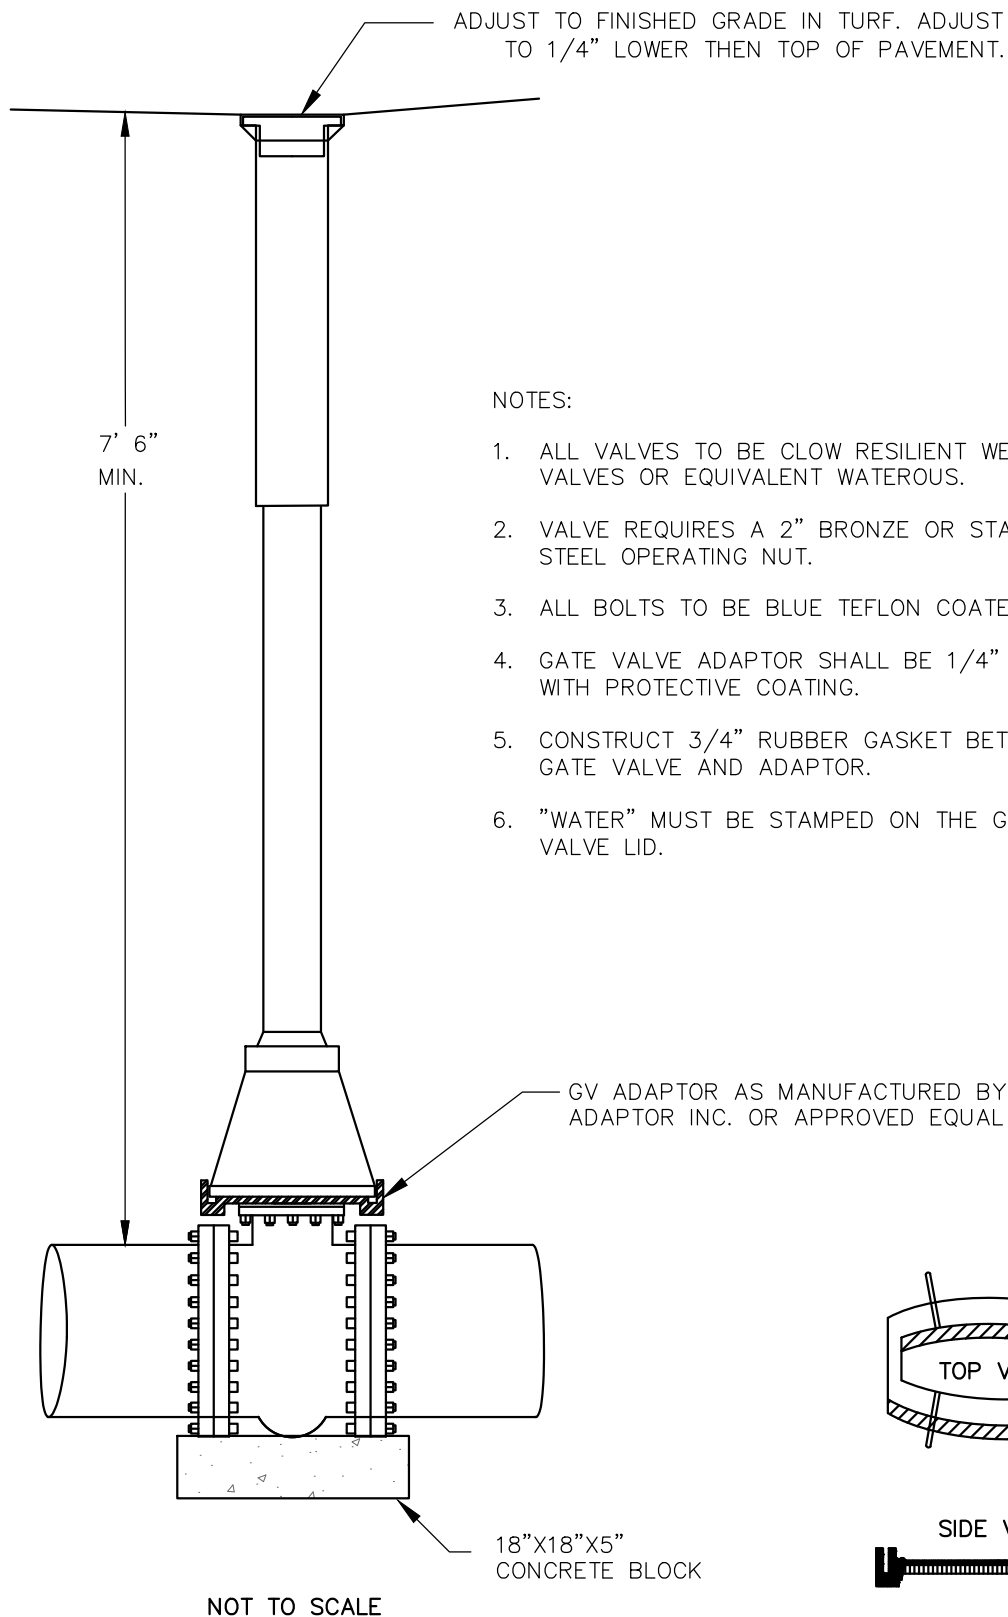

NOTES:

1. ALL VALVES TO BE CLOW RESILIENT WEDGE GATE VALVES OR EQUIVALENT WATEROUS.
2. VALVE REQUIRES A 2" BRONZE OR STAINLESS STEEL OPERATING NUT.
3. ALL BOLTS TO BE BLUE TEFLON COATED BOLTS.
4. GATE VALVE ADAPTOR SHALL BE 1/4" STEEL WITH PROTECTIVE COATING.
5. CONSTRUCT 3/4" RUBBER GASKET BETWEEN GATE VALVE AND ADAPTOR.
6. "WATER" MUST BE STAMPED ON THE GATE VALVE LID.



GATE VALVE ADAPTOR