


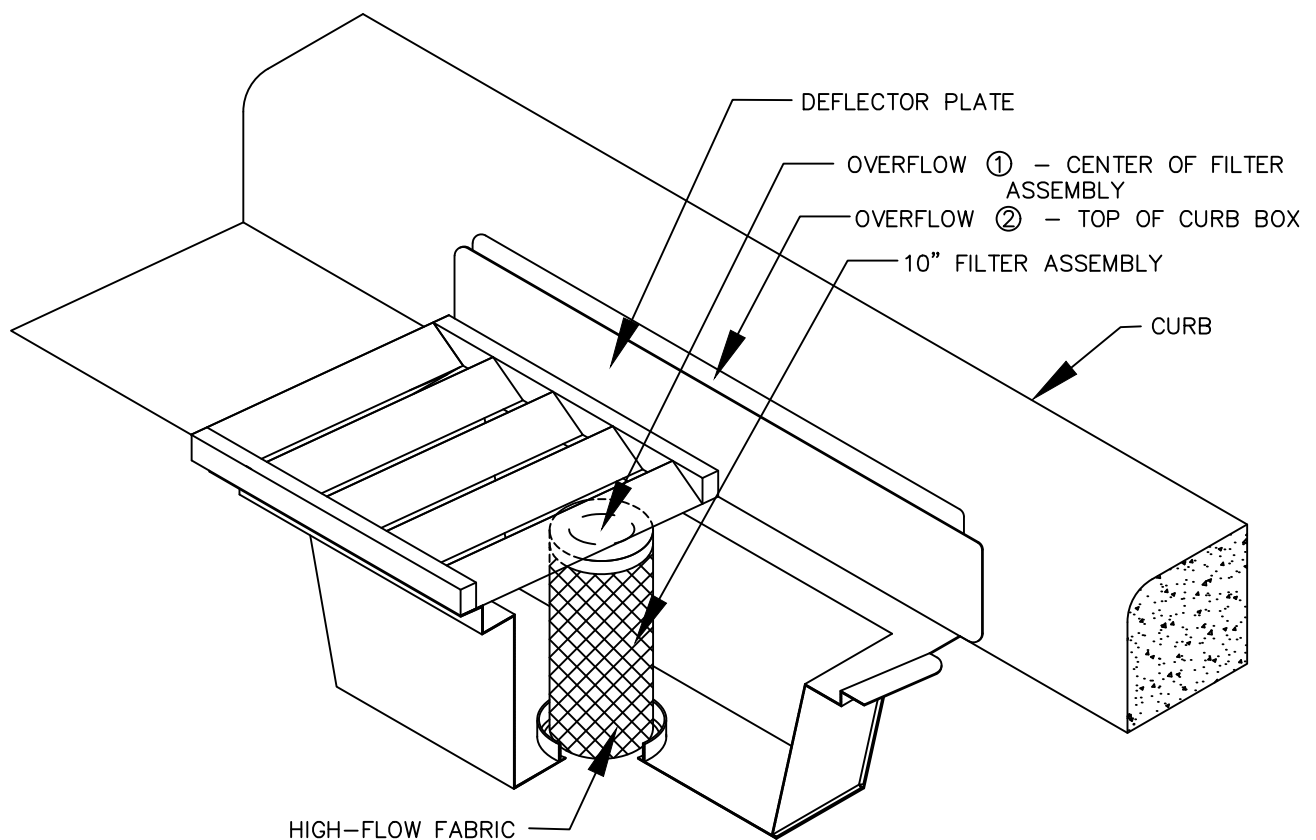

NOTES:

1. AS PART OF SWPPP REQUIREMENTS, THE CONTRACTOR SHALL INSPECT ALL INLET PROTECTION AT DEFINED INTERVALS, AS WELL AS AFTER QUALIFYING RAIN EVENTS. INLET PROTECTION SHALL BE MAINTAINED PER MANUFACTURES INSTRUCTIONS AND IN ACCORDANCE WITH ALL SWPPP REQUIREMENTS AND/OR AT THE DIRECTION OF THE ENGINEER.
2. INLET PROTECTION DEVICE MUST BE SPECIFIC FOR CURB TYPE AND FIT PROPERLY. THIS WILL ENSURE WATER AND SEDIMENT DO NOT BYPASS THE DEVICE.
3. AN ATTACHED BACKSTOP IS REQUIRED FOR INLET PROTECTION. ROCK LOGS OR OTHER DEVICES ARE NOT ALLOWED.
4. ALL LABOR, MATERIALS, AND EQUIPMENT TO FURNISH, INSTALL, MAINTAIN, REMOVE DEBRIS AND REMOVE DEVICE SHALL BE PAID PER EACH UNIT.