

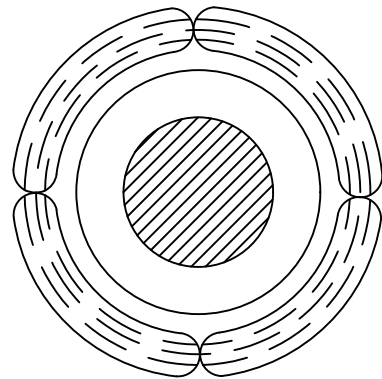


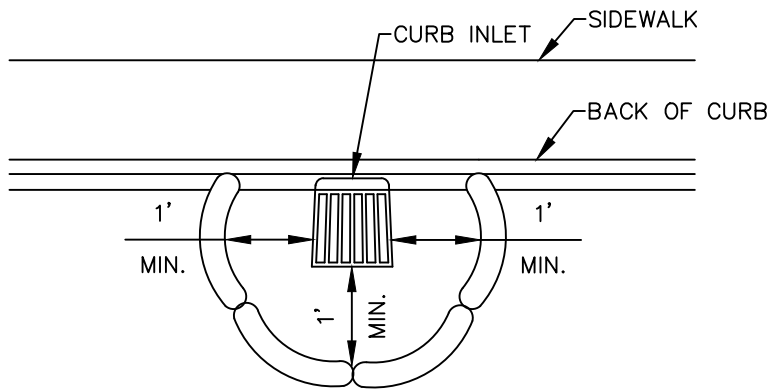

INLET PROTECTION
WITH ROCK LOG

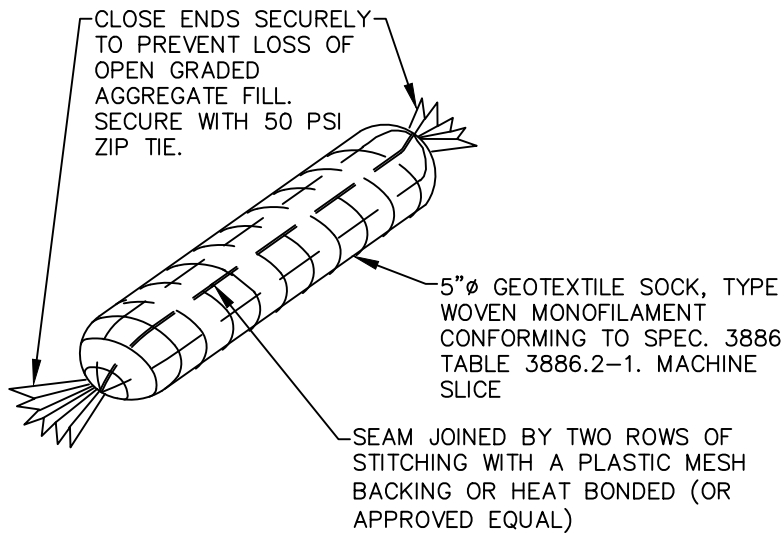

NOT TO SCALE

NOTES:

1. ONLY USE THIS INLET PROTECTION DURING ROUGH GRADING, BEFORE ROAD IS PAVED OR OPEN TO TRAFFIC.
2. FILL ROCK LOG WITH 45 LBS. OF OPEN GRADED AGGREGATE CONSISTING OF SOUND, DURABLE PARTICLES OF CRUSHED QUARRY ROCK OR GRAVEL CONFORMING TO THE FOLLOWING GRADATION.
3. CRUSHED CONCRETE OR BITUMINOUS SHALL NOT BE USED FOR OPEN GRADED AGGREGATE.
4. PAYMENT SHALL INCLUDE ALL MATERIALS, FILLING OF LOG, PLACEMENT, MAINTENANCE AND REMOVAL.
5. 80% OF BID PRICE SHALL BE PAID UPON PROPER PLACEMENT. THE FINAL 20% WILL BE PAID UPON REMOVAL.

GRADATION	
SIEVE SIZE	PERCENT PASSING
1 1/2"	100
1"	95-100
3/4"	65-95
3/8"	30-65
NO 4	10-35
NO 10	3-20
NO 40	0-8
NO 200	0-3